


INVITATION TO BID

PURCHASE REQUEST NO: 1-18-01-0272

Sealed bids for quotation of prices will be received for the purchase of the following supplies, materials and equipment of the government to be opened on the date, place and time stated in **INSTRUCTION TO BIDDERS**.

ITEM #	QTY.	UNIT	ARTICLES	U PRICE	TOTAL
Delivery Term: (All Lots) 15 Calendar Days upon receipt of P.O. Note: Please indicate BRAND and MODEL NO. in your bid.					
1	2	unit	Lot I 10,000 watts Generator Set (Gasoline) 10,000 surge watts, electric start 25L metal gas tank with gauge, with AVR for stable voltage copper wound alternator with cast aluminum bearing support with low oil shutdown and with indicator lamp convenient control panel features 120/240 Volt outlet, on/off switch, voltmeter and circuit breaker protection star grip control - easy and intuitive operation, heavy duty, good quality With CDRRMO Logo with warranty	_____	_____
1	3	unit	Lot II 20" Chainsaw (heavy duty) 20 inches guide bar, carbide alloy plating guide bar oilmatic lubricating system, with chain maintenance kit (file holder with round file, flat file, file gauge in a sturdy case, reference gauges), with fillernozzle for fuel with filler nozzle for chain oil With CDRRMO Logo with warranty	_____	_____
1	1	unit	Lot III MEGAPHONE (60W) Max power (60W) with extension microphone Heavy duty Talk switch Siren switch Hands-free operation Microphone volume control Built-in microphone with voice recording function ABS plastic construction Rated power - 60 watts with Adjustable carry strap with rechargeable batteries included (12V lithium battery) can also be powered by 8pcs C type batteries with 12V DC car adapter with instruction manual with CDRRMO Logo and San Carlos City Logo with warranty	_____	_____

1	8	unit	<p>Lot IV Handheld Radio 5.5 RF Output 200 Memory Channels with 6-Digit Memory name Backlight LCD and Keypad Power-On Message Direct Function Key Direct Frequency Entry Auto Repeater Offset Battery Save 1,750 Hz Tone Burst Time-Out Timer Battery Select Li-ion/AAA Battery) Beat Shift Frequency Shift VOX Circuit Included (operation with optional headset) Battery Capacity Indicator Wide/Narrow Deviaton Selection (per channel) Busy Channel Lock-Out Tone Alert (bell) CTCSS and DCS Encoder/Decoder + Cross Tone Capacity Firmware Upgradeable Key Lock Type Select Weather Alert/RX/Channel Scan with Electronic Serial Number with compatible Battery Pack with Ni-MH Battery Charger with Rubber Duckie Antenna with Belt Clip with NTC License with Instruction Manual with Warranty (1 year)</p>		
2	8	unit	<p>Battery Pack Ni-MH Battery Pack compatible with Lot IX; Item No.1 with Warranty (6 months)</p>		
			Sub-Total		
1	2	unit	<p>Lot V Radio Base/Mobile Base Radio Antenna Impedance: 50 ohms Current Drain Receive: Less than 1 A Current Drain Transmit: Less than 14 A Dimensions (W x H x D): 6.3 x 1.69 x 4.69 in. (160 x 43 x 126 mm) Weight (approx.): 2.6 lbs. (1.2 kg) Frequency Range: TX: 144 - 148 MHz, RX: 136 - 174 Microphone Impedance: Microphone Impedance Frequency Tolerance: ± 2.5 PPM -20°C to 60°C Operating Temperature Range: -20°C to 60°C Power Requirement: 13.8V DC (±15%) Audio Output Power: More than 2W (8 ohms, 5% distortion) Circuitry: Double conversion superheterodyne Intermediate Frequency 1st IF: 49.95 MHz Intermediate Frequency 2nd IF: 450 kHz Selectivity -6 dB: More than 12 kHz (Narrow 10 kHz) Selectivity -60 dB: Less than 30 kHz (Narrow 24 kHz) Sensitivity (12dB SINAD): Sensitivity (12dB SINAD)</p>		

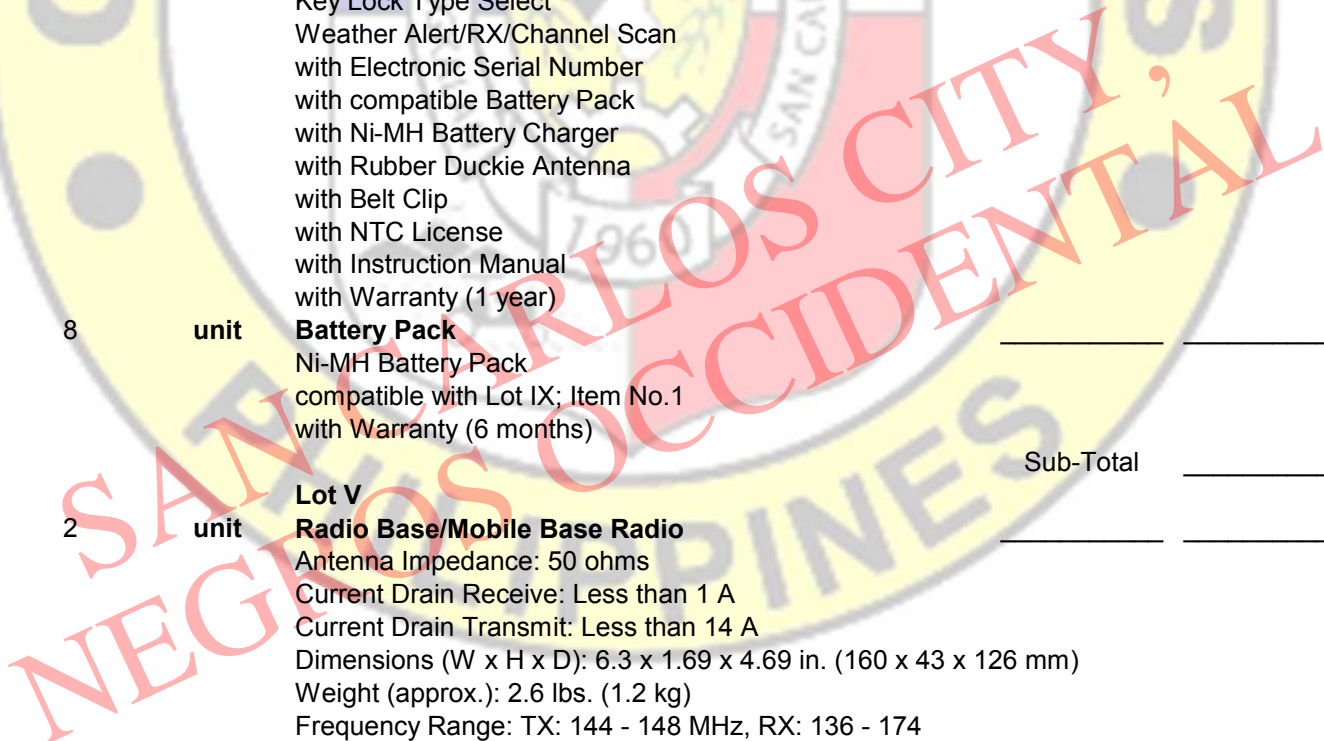

Squelch Sensitivity: Squelch Sensitivity
 Squelch Sensitivity: Within ±10 ppm
 Maximum Frequency Deviation: Maximum Frequency Deviation
 Modulation: Reactance modulation
 Modulation Distortion: Less than 3% (300 Hz ~ 3 kHz)
 Less than 3% (300 Hz ~ 3 kHz): 65 W
 RF Output Power LO: 25 W
 with Hand Microphone
 with Power Cord
 with Software and Instruction Manual
 with NTC License
 with Installation
 with Warranty (1 year)

2	2	unit	Radio Base Antenna Frequency: 136-174Mhz Gain: 7.80dBi with Warranty	_____	_____
3	2	unit	External Speaker compatible with Item No. 1 with Warranty (at least one year)	_____	_____
4	20	meter	RG213/U Coax Cable flexible coax cable single shielded with black PVC jacket low loss cable with a non-contaminating jacket 0.405 inches outer diameter 50 ohms impedance 66% Velocity stranded center conductor braided outer conductor black PVC II-A jacket 96% bare copper braid shielding	_____	_____
5	2	set	PL259 UHF Coaxial Connector use in low frequency system from 0.6 - 300 MHz non-constant 0-300MHz 500 volts peak 5/8-24 threaded coupling braid solder, set screw clamp and crimp male: brass; silver plated female: beryllium copper, silver plated brass and die cast zinc nickel and silver plating insulators: TFE, copolymer of styrene, polystyrene, mica-filled phenolilc and PBT polyster or equal	_____	_____
6	2	unit	Power Supply Output 13.8 Volts Direct Current (VDC) 30amps Input 180-220 Volts Alternating Current (VAC) 60hz with Warranty	_____	_____
				Sub-Total	_____
1	12	piece	Lot VI Fabricated Triangular Bandage white katsa cloth with SCC Logo print, please see attached design	_____	_____

